


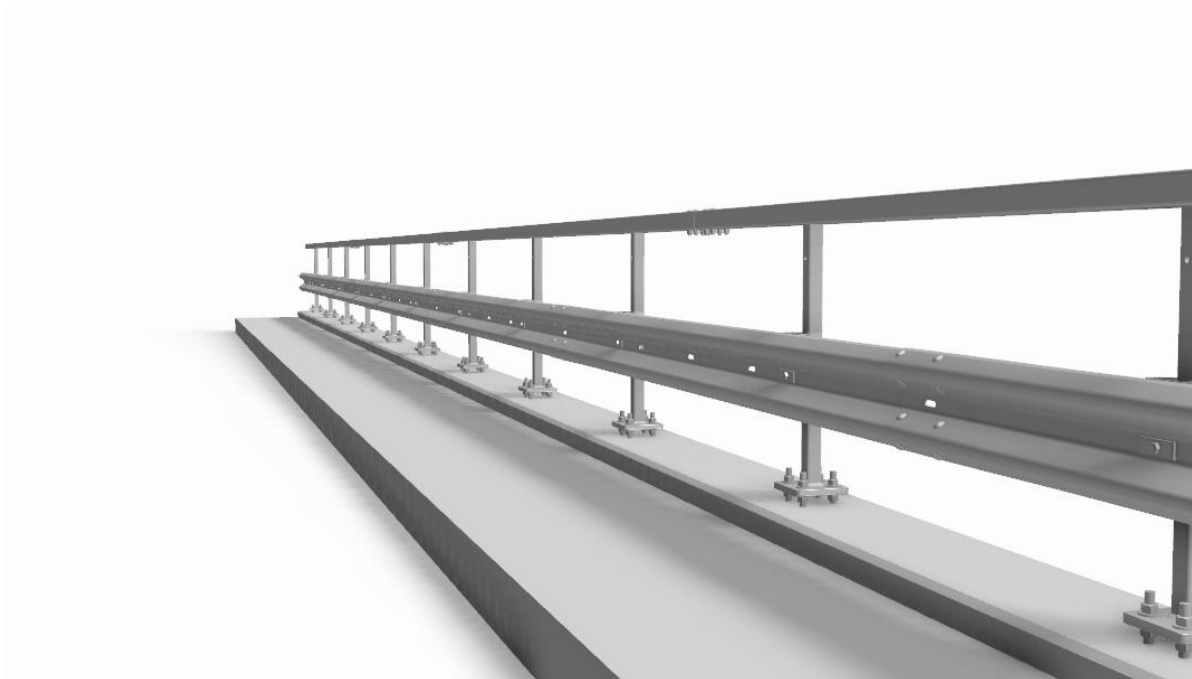

Produktinformation		Product information	
Produktbeskrivning: Räcke med W profil som navföljare, 120x80 som toppföljare monterat på 60x60x8 ståndare.		Product description: Safety barrier with W profile as safety rail, 120x80 as top rail fixed at 60x60x8 post.	
Harmoniserad standard: EN1317-5:2007/A2:2012		Harmonised standard: EN1317-5:2007 / A2:2012	
Kapacitetsklass	H2	Containment level	H2
Ständaravstånd (m)	2.0	Post spacing (m)	2.0
Norm. fordonsinträngning (klass)	VI4	Norm. vehicle intrusion (class)	VI4
Norm. fordonsinträngning (m)	1.1	Norm. vehicle intrusion (m)	1.1
Norm. arbetsbredd (klass)	W2	Norm. working width (class)	W2
Norm. arbetsbredd (m)	0.7	Norm. working width (m)	0.7
Norm. dynamisk utböjning (m)	0.5	Norm. dynamic deflection (m)	0.5
Skaderiskklass	B	Impact severity level	B
Konstruktionsbredd (m)	0.21	Construction width (m)	0.21
Konstruktionshöjd (m)	1.2	Construction height (m)	1.2
Motstånd mot snöplogning (klass)	3	Resistance to snow removal(class)	3
Beständighet: Varmförzinkad enligt SS-EN ISO 1461:2009 Nationell Bilaga Fe/Zn 115		Durability: Hot dip galvanized coatings according to SS-EN ISO 1461:2009 National Annex. Fe/Zn 115	